

ProSeries™ HL Side

ATTRACTIVE, STURDY DESIGN

- **Fibreglass-reinforced polyester filter body** for enhanced pressure resistance. Its structure gives it great strength
- **A complete range:** four products to suit all your customers' pool configurations
- **Bolted opaque cover**
- **Wide top opening** to facilitate easier sand loading
- **Supplied with 6-way valve.**
- All models are fitted with a **pressure gauge**




6-position valve with integrated pressure gauge



Drain plug for easy maintenance



Wide top opening for easier sand loading

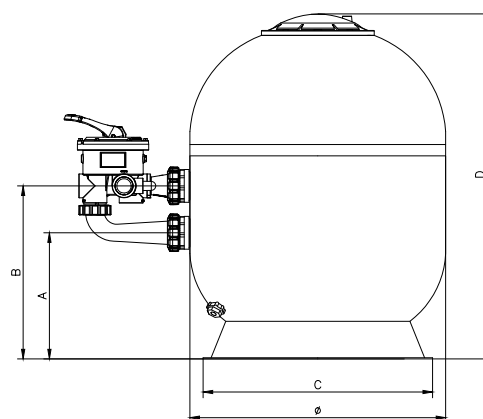

PROSERIES™
HL SIDE

Flow rate	Diameter Ø	In/Out	Filtration area	Empty weight	Sand	Dimensions				Item.
						A	B	C	D	
10 m³/h	520 mm	1" ½	0.21 m²	11 kg	100 kg	305 mm	430 mm	458 mm	775 mm	S210SLE
14 m³/h	640 mm	1" ½	0.32 m²	21 kg	165 kg	315 mm	440 mm	458 mm	860 mm	S240SLE
22.5 m³/h	760 mm	2"	0.45 m²	31 kg	305 kg	365 mm	455 mm	605 mm	900 mm	S310SLE
31.5 m³/h	900 mm	2"	0.63 m²	40 kg	425 kg	365 mm	505 mm	605 mm	900 mm	S360SLE

*The VariFlo™ valve with connection 1.5" is available only in diameters 520 and 640 (after production stocks have run out).
2" connection filters are supplied with valve Ref. 250120011300 and unions Ref. 500200061100.